


Ultra-QuietTest Fan Series

Models: LS50SE, LS80SE & LS100SE

DESCRIPTION

- Model LS50SE: For bathrooms up to 45 sq. ft., other rooms up to 60 sq. ft.
- Model LS80SE: For bathrooms up to 75 sq. ft., other rooms up to 100 sq. ft.
- Model: LS100SE: For bathrooms up to 105 sq. ft., other rooms up to 135 sq. ft.
- White polymeric grille held firmly in place with torsion springs.
- Centrifugal blower wheel for smooth, ultra quiet operation.
- Built-in non-metallic damper quietly helps prevent backdraft.
- Excellent for applications where low noise levels are important.
- Motor is cushioned with vibration isolators.
- Prewired outlet box is built into housing; features a plug-in receptacle.
- Choice of two (2) knockouts for wiring entrance.
- Adjustable hanger brackets for mounting between ceiling joists 16" O.C.
- Ducts horizontally with 4" duct.
- Refer to NuTone's catalog for a complete line of accessories to effectively adapt these fans to your construction requirements.

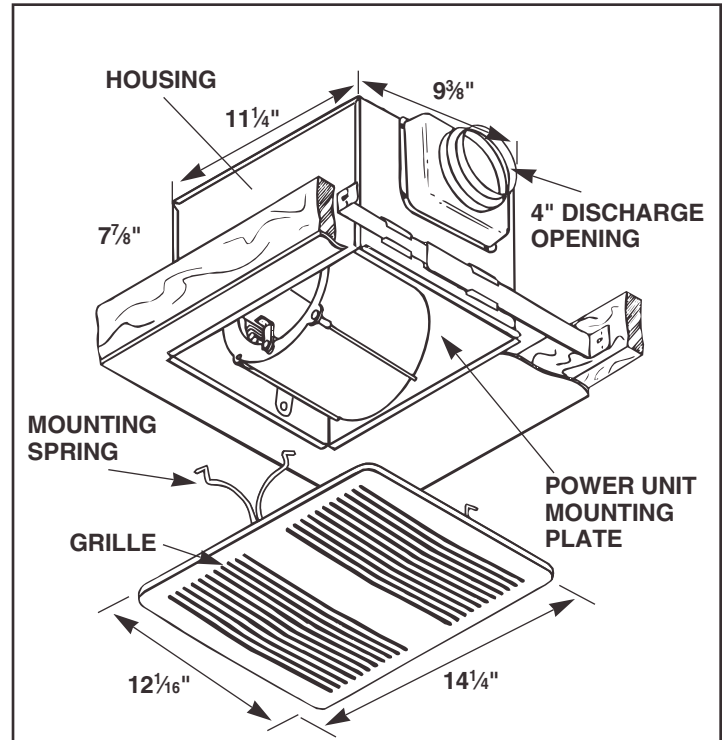


DESIGN FEATURES

HVI Air Delivery:	Model LS50SE: 50 CFM at 0.1" S.P. 21 CFM at 0.25" S.P.
	Model LS80SE: 80 CFM at 0.1" S.P. 68 CFM at 0.25" S.P.
	Model LS100SE: 100 CFM at 0.1" S.P. 90 CFM at 0.25" S.P.
HVI Sound Level:	Model LS50SE: 1.2 sones
	Model LS80SE: 0.9 sones
	Model LS100SE: 1.5 sones
Dimensions:	Housing: 9 3/8" x 11 1/4" x 7 7/8".
	Grille: 14 1/4" x 12 1/16". Extends 0.75" below ceiling.


Material & Finish:	Housing: Cold rolled steel, baked enamel finish.
	Grille: White Polymeric.
Motor:	Plug-in. Thermally protected. Sleeve bearings. Shaded pole.
	Electrical Rating: Model LS50SE: .71 amps, 120 volts. Model LS80SE: 1.2 amps, 120 volts. Model LS100SE: 1.9 amps, 120 volts.
Impeller:	One centrifugal type. 5.5" dia. x 4" wide.
Damper:	Polypropylene.

AIR PERFORMANCE CURVE – LS50SE
(4 In. Duct to 10 Foot Lengths)

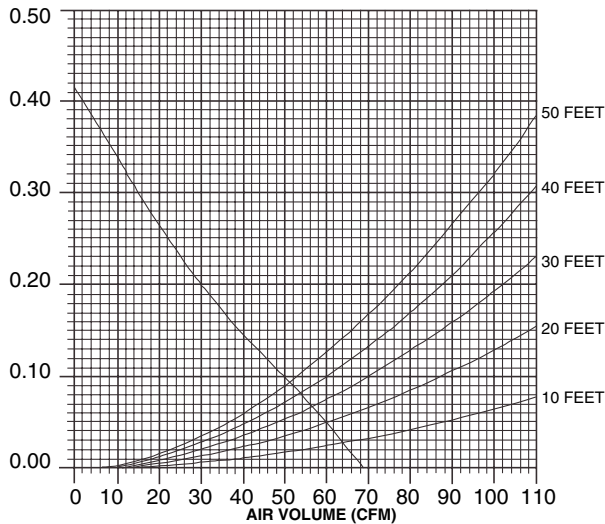


STATIC PRESSURE INCHES OF WATER	0.05	0.1	0.15	0.2	0.25	0.3	0.4	0.5	0.75	1.0
CFM	60	50	39	30	21	15	2	—	—	—

AIR PERFORMANCE CURVE – LS100SE
(4 In. Duct to 10 Foot Lengths)

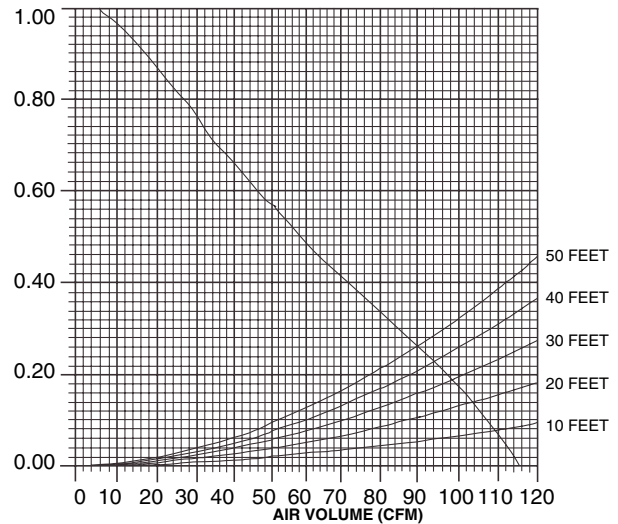

STATIC PRESSURE INCHES OF WATER	0.05	0.1	0.15	0.2	0.25	0.3	0.4	0.5	0.75	1.0
CFM	115	107	102	96	90	84	70	58	32	6

AIR PERFORMANCE CURVE – LS80SE
(4 In. Duct to 10 Foot Lengths)

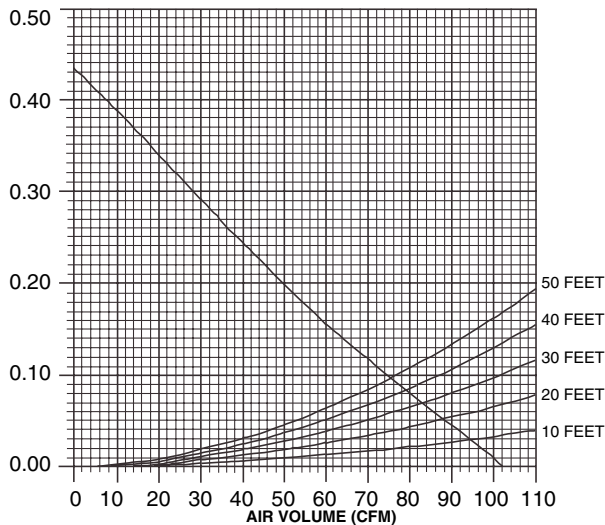

STATIC PRESSURE INCHES OF WATER	0.05	0.1	0.15	0.2	0.25	0.3	0.4	0.5	0.75	1.0
CFM	95	88	81	74	68	61	50	39	13	—

INSTALLATION

- Not for use in kitchens.
- UL Listed for shower/tub enclosure when used with GFI branch circuit wiring.
- Suitable for installation in direct contact with thermal insulation.
- Housing installs in ceiling to 16" on center joists with adjustable brackets. In existing construction, the unit requires a 9½" x 11½" cutout.
- Motor/blower wheel assembly and grille are installed when finished ceiling is in place.
- Grille snaps into place and is held securely with torsion springs.
- Suitable for use with solid state speed controls. Switches are sold separately.
- Complete installation instructions included with each unit.



CERTIFIED TEST DATA

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements. This NuTone model is listed by Underwriters' Laboratories Inc. and Certified by the Canadian Standards Association (CSA.)

The air delivery of a ventilating system may be determined by:

1. Determine the equivalent duct length for each 90 degree elbow by adding one foot of duct length for each inch of duct diameter, i.e., a 4 inch diameter duct elbow equals 4 feet equivalent duct length and an 8 inch diameter duct elbow equals 8 feet equivalent duct length.
2. Add the total straight length of duct and the equivalent length for each elbow to obtain the total equivalent duct length.
3. Locate the intersection of the fan performance curve and the total equivalent duct length curves and draw a vertical line down to the CFM scale and read the system air performance.
(NOTE: ¾" x 10" duct equals 6 inch diameter duct.)

ARCHITECT'S SPECIFICATIONS

Exhaust Fan(s) shall be Model LS50SE, LS80SE or LS100SE as manufactured by NuTone according to listed specifications.

Product specifications subject to change without notice.