

## Auxiliary Heaters

# Register Heater

**MODELS: 9315T or 9315XT**

### DESCRIPTION

- Perfect heating option for family room, offices or dens
- Inconspicuous, styled like conventional forced-air register.
- Select 750W or 1500W at installation with plug-in elements
- For your convenience, NuTone offers a complete line of accessories to effectively adapt this unit to your construction requirements.

### DESIGN FEATURES

**Total Connected**

**Load:** Model 9315: 1200 watts.  
Model 9358: 1500 watts.

**Element Watts:** 1200 watts.

**British Thermal Units:**

Model 9356: 4094 BTU  
Model 9358: 5118 BTU

**Dimensions:**

**Housing:** 10<sup>1</sup>/<sub>16</sub>" x 16" x 3<sup>1</sup>/<sub>2</sub>"  
**Reflector:** 10" outside diameter.  
**Grille:** 10<sup>7</sup>/<sub>8</sub>" diameter.

**Material &:**

**Housing:** Cold rolled steel with enamel finish.


**Component Data:**

**Reflector:** Aluminum.

**Heating Element:** Open coil, nickel-chromium.

**Thermal Protector:** Bi-metal snap action – Opens at 285°F maximum, recloses no higher than 200°F.

**Motor:** Impedance protected. 120vAC, 60Hz, 15 watts.

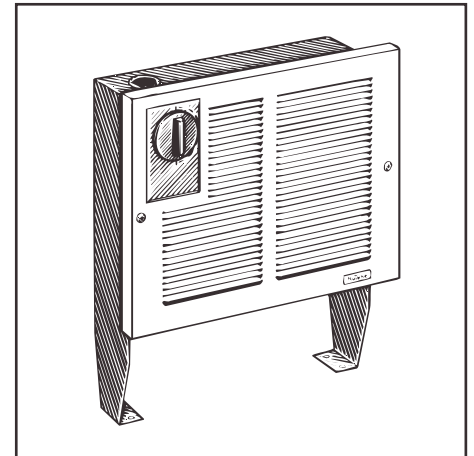

### CERTIFIED TEST DATA

This NuTone model meets or exceeds applicable requirements of Underwriters' Laboratories, Inc.

### ARCHITECT'S SPECIFICATIONS

Wall Heater(s) shall be Model 9315T or 9315XT as manufactured by NuTone according to listed specifications.

### INSTALLATION

- Mounts to any standard 3" or 4" junction box through provided keyhole slots.
- Installation instructions included with each unit.

NUTONE, INC. / 4820 RED BANK ROAD, CINCINNATI, OHIO 45227  
Product specifications subject to change without notice.

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by      Date